



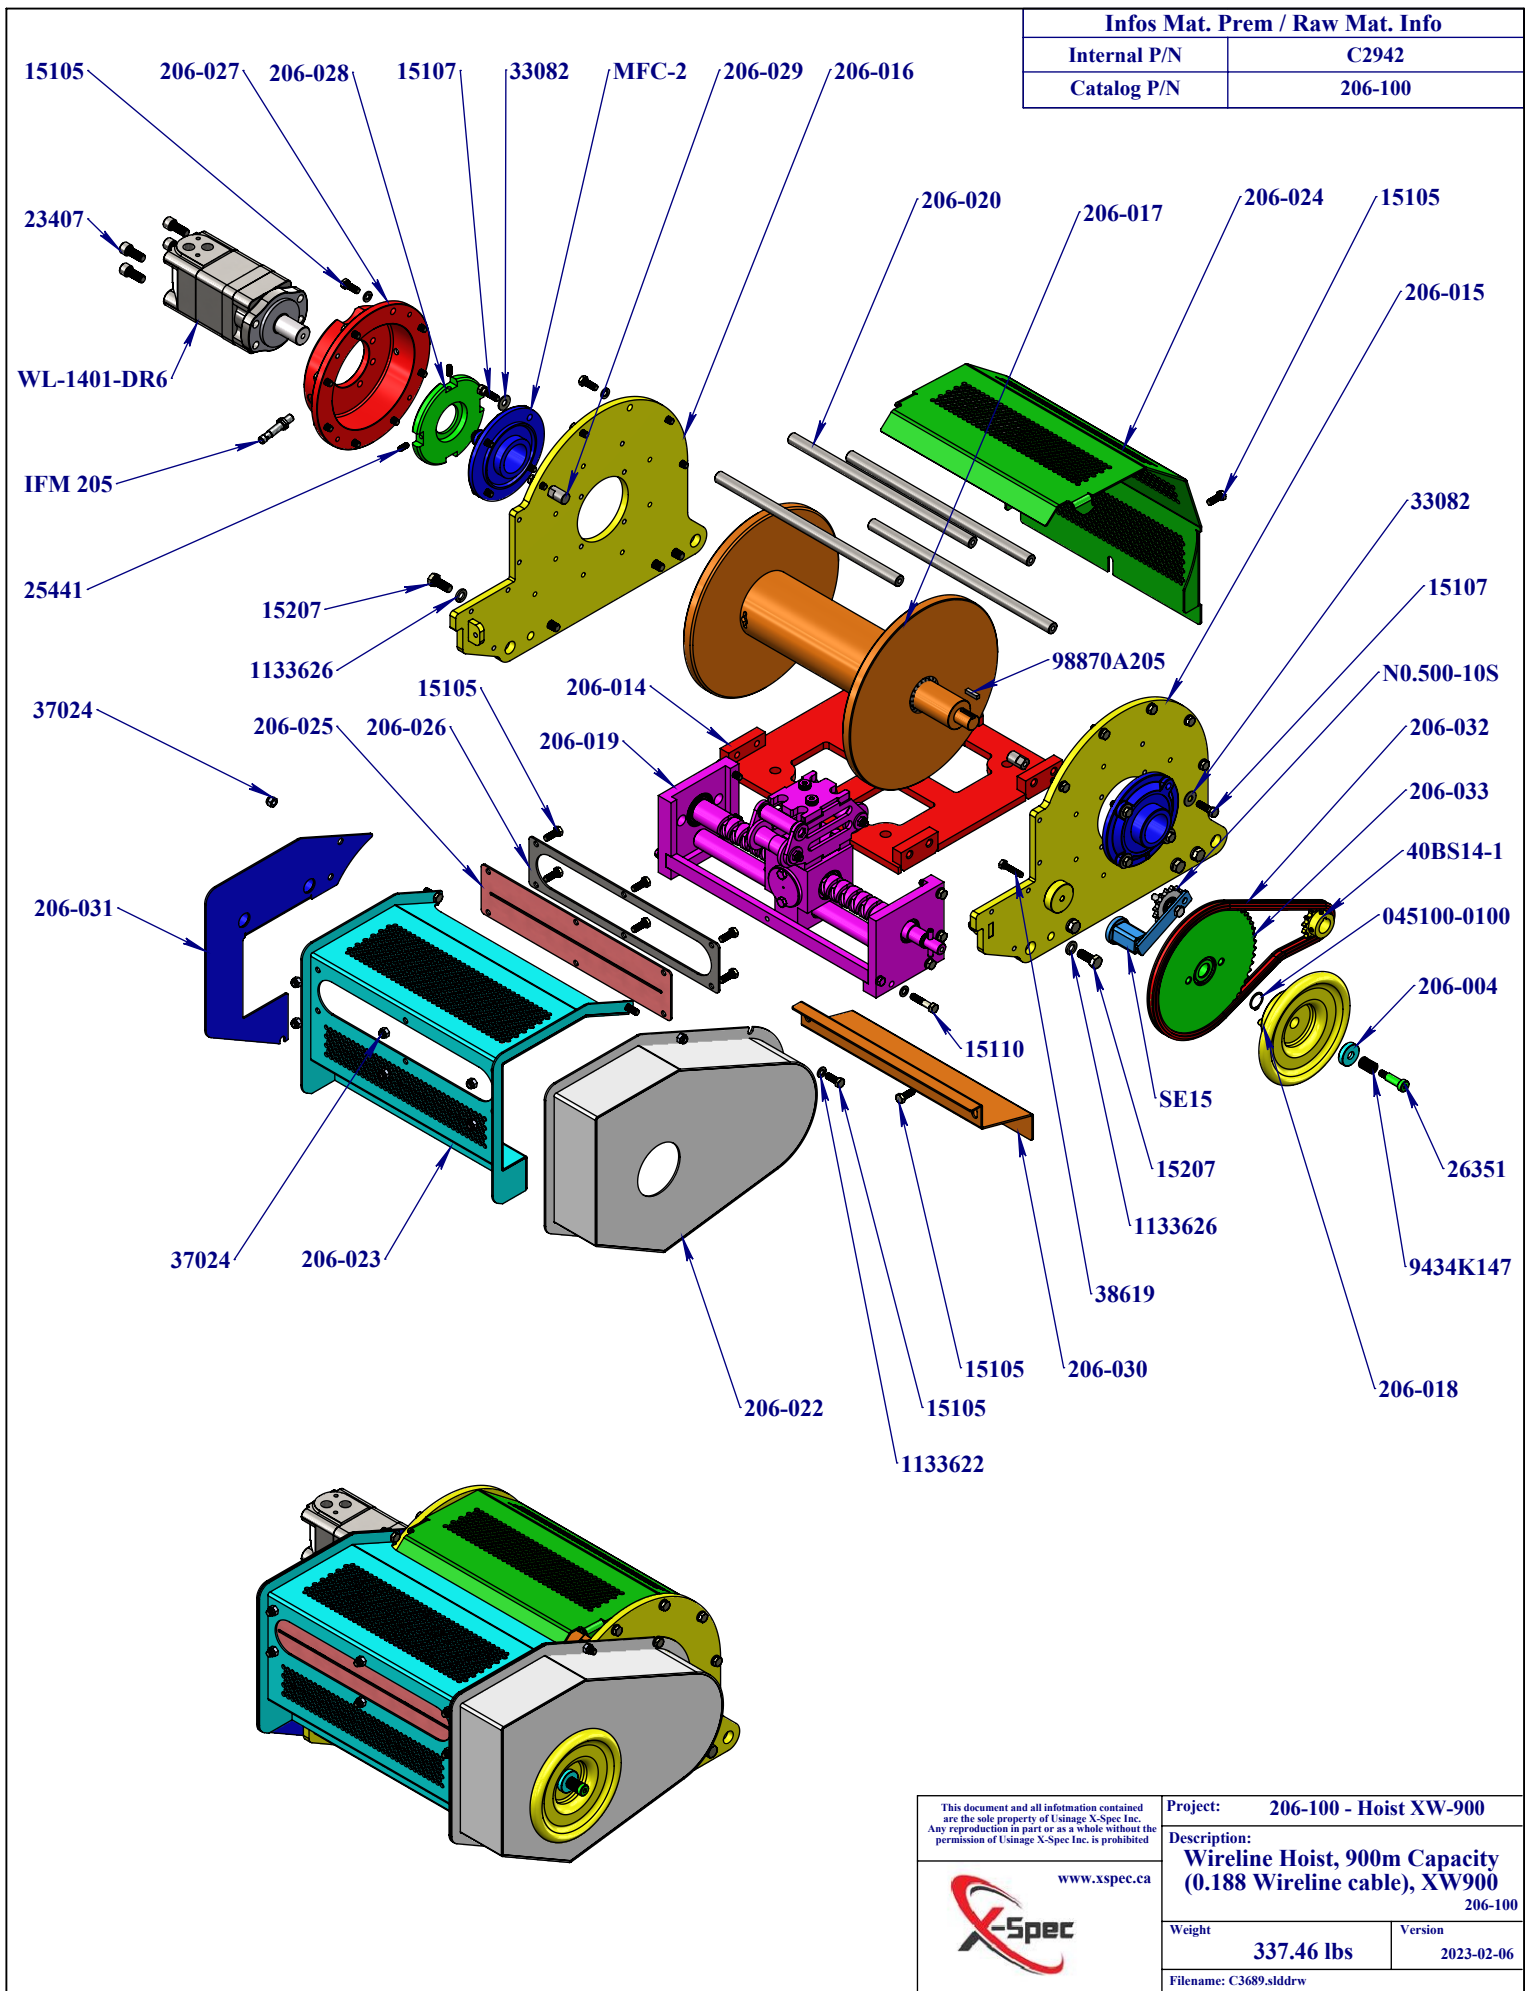

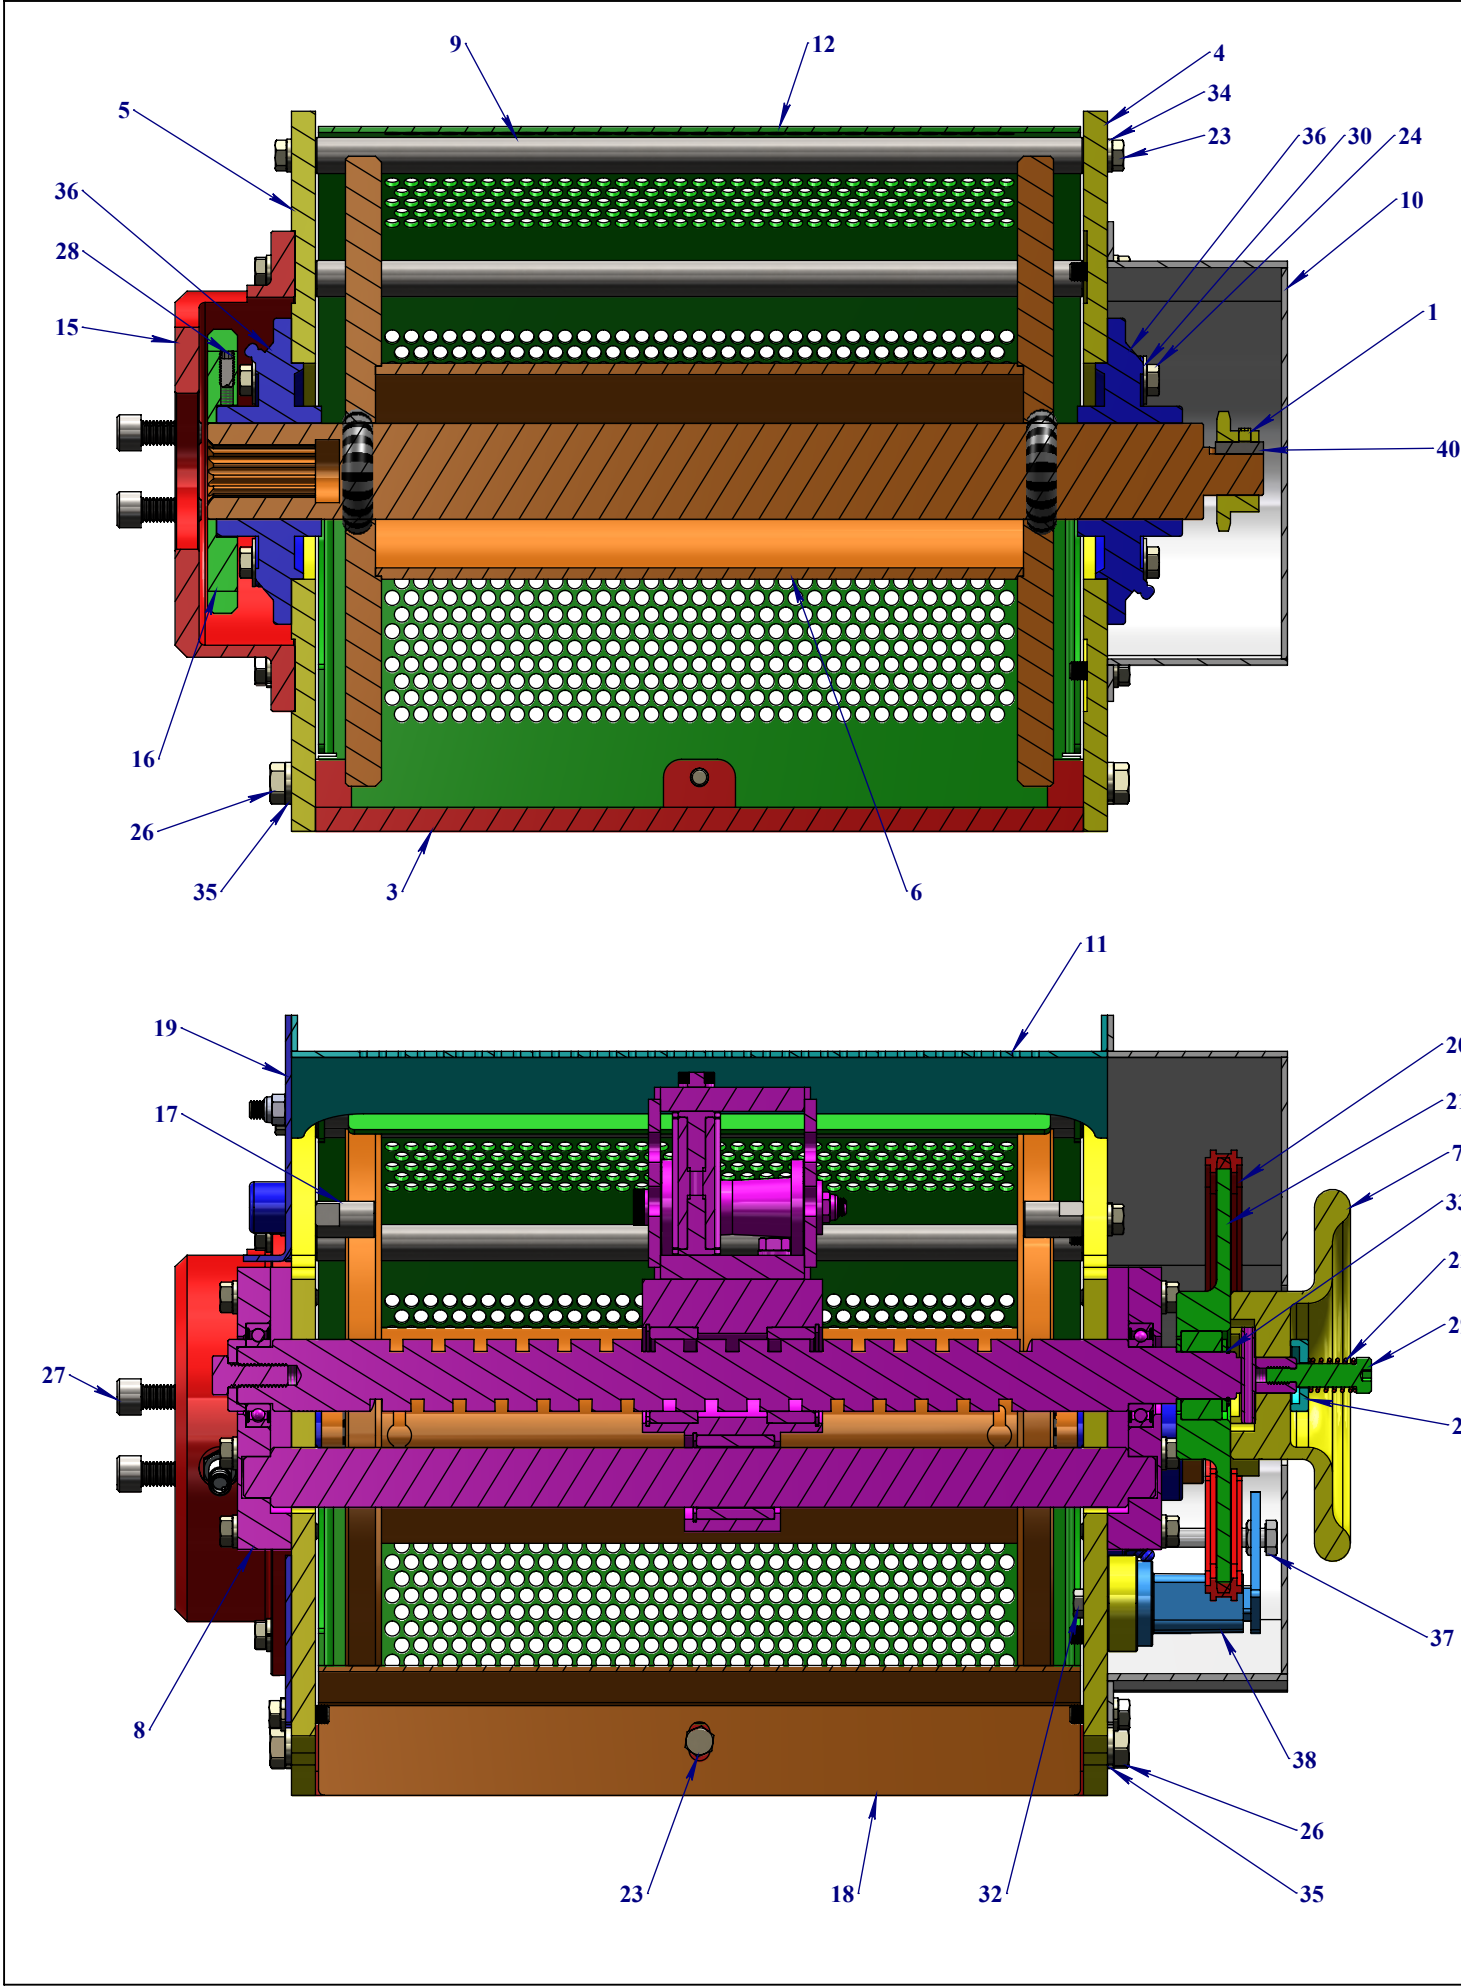

Item #	Part Number	Description	Qty	Unit Weight
1	40BS14-1	40BS14 Sprocket, Bore 1.000"	1	0.46
2	206-004	Washer	1	0.116
3	206-014	Base	1	26.287
4	206-015	Right Side Frame Plate	1	29.460
5	206-016	Left Side Frame Plate	1	28.917
6	206-017	Drum Assy	1	84.608
7	206-018	Handle Assy	1	8.92
8	206-019	Winding Screw Assy	1	56.603
9	206-020	Shaft	4	1.97
10	206-022	Right Hand Guard	1	15.258
11	206-023	Front Guard	1	12.091
12	206-024	Drum Guard	1	11.548
13	206-025	Liner, 0.250"	1	0.268
14	206-026	Holding Plate	1	0.870
15	206-027	Motor Mount	1	12.498
16	206-028	Encoder Ring	1	3.674
17	206-029	Shaft	2	0.13
18	206-030	Guard Plate	1	5.121
19	206-031	Left Hand Guard	1	3.503
20	206-032	Drive Chain, Wireline Hoist, 39" OAL	1	2.680
21	206-033	Sprocket, C/W Bushing	1	6.486
22	9434K147	Compression Spring	1	
23	15105	3/8-16 x 1" Grade 8 Yellow Zinc Finish Hex Cap Screw	35	0.0453
24	15107	3/8-16 x 1-1/4" Grade 8 Yellow Zinc Finish Hex Cap Screw	8	0.0547
25	15110	3/8-16 x 1-3/4" Grade 8 Yellow Zinc Finish Hex Cap Screw	8	0.0704
26	15207	1/2-13 x 1-1/4" Grade 8 Yellow Zinc Finish Hex Cap Screw	8	0.1037
27	23407	1/2-13 x 1-1/4" ASTM A574 Hex Drive Black Oxide Finish Alloy Steel Socket Cap Screw	4	0.102000
28	25441	5/16-18 x 3/4" Hex Drive Cup Point Black Oxide Finish Alloy Steel Socket Set Screw	2	0.012
29	26351	1/2 Shoulder x 1-1/4" Shoulder Length x 3/8-16 Black Oxide Alloy Steel Socket Shoulder Bolt	1	0.120
30	33082	3/8" x 0.812" OD Low Carbon Zinc Finish Steel SAE General Purpose Flat Washer	8	0.012
31	37024	3/8-16 Grade 2 Zinc Finish NE Steel Nylon Insert Lock Nut	8	0.022
32	38619	M8-1.25 x 40mm DIN 931 Class 8.8 Zinc Finish Hex Cap Screw	1	0.04
33	045100-0100	External Retaining Ring	1	0.0037
34	1133622	3/8 Zinc Finish Medium Split Lock Washer	30	0.006
35	1133626	1/2 Zinc Finish Medium Split Lock Washer	8	0.013
36	MFC-2	Cast Iron Flange Cartridge Bearing Unit, 2.000"	2	6.168
37	N0.500-10S	Tensioner Sprocket Assy	1	0.368
38	SE15	Rosta Tensioner	1	0.000000
39	WL-1401-DR6	Hydraulic Motor, 1-1/4, 14T Spline Shaft	1	0.000000
40	98870A205	Machine Key, 1018-1045 Steel, 1/4" x 1/4", 1" Long, Undersized	1	0.02

SI NON SPÉCIFIÉ LES
DIMENSIONS SONT EN POUCES
ET LES TOLÉRANCES:

FRACTIONS DECIMALES ANGLES
± 1/16" .XX ± 0.05 ± 1deg
 .XXX ± 0.005



www.xspec.ca

CE DOCUMENT ET TOUTES LES INFORMATIONS
QU'IL CONTIENT SONT LA PROPRIÉTÉ DE
USINAGE X-SPEC INC. TOUTE REPRODUCTION
EN TOTALITÉ OU PARTIELLE EST INTERDITE
SANS L'AUTORISATION DE USINAGE X-SPEC INC.

DESSINÉ PAR:
System Administrator

Poids/Weight
337.46 lbs

ÉCHELLE:
1:4

PROJET: 206-100 - Hoist XW-900

DESCRIPTION:
Wireline Hoist, 900m Capacity
(0.188 Wireline cable), XW900
206-100

SIZE
B

DE DESSIN:
C2942

REV.
B

NOM DU FICHIER: C3689.slddrw

FEUILLE 2 DE 2